

31 FINISHES

Cressida Skirting



Cressida Skirt · 95 × 11 mm

THE COLLECTION

Cressida Skirting

A moulded skirting profile in bamboo-fibre composite — 95 mm high with a classical stepped top edge. Thirty-one finishes: seven timber decors and twenty-four solids running from bone and putty through to oxblood, ochre and deep teal, for a skirting that reads as trim rather than an afterthought.

Every finish is held against the code printed beneath it. Quote the code and the profile when raising an enquiry, and order the full quantity against a single production batch — shades vary slightly between runs.

Water resistant

Suited to kitchens, wash areas and covered balconies; will not swell like MDF.

Termite resistant

The composite core carries no cellulose food source.

Fire resistant

Self-extinguishing formulation; certificates available on request.

Colour stability

UV-stable decor layer holds its tone in daylit interiors.

Anti-fingerprint

Low-sheen face resists marking on high-traffic surfaces.

Easy to clean

Damp cloth and mild detergent; no wax or polish required.

PROFILE	LENGTH	SECTION	FINISHES
Cressida Skirt	2900 mm	95 × 11 mm	31

Timber Decors

PROFILE 2900 × 95 × 11 MM



S-01

95 MM



S-02

95 MM



S-03

95 MM



S-04

95 MM



S-05

95 MM




S-06

95 MM



S-07

95 MM



SKIRT SECTION · 95 × 11 MM


Solid & Textured Finishes

PROFILE 2900 × 95 × 11 MM




S-08

95 MM

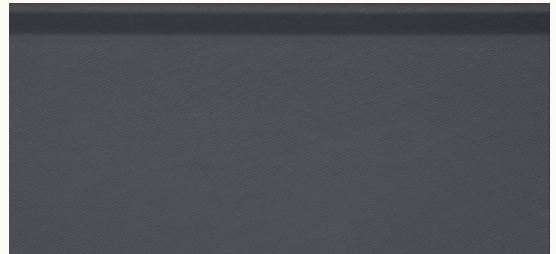


S-09

95 MM

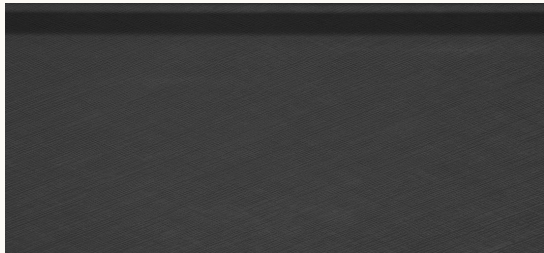


S-10

95 MM

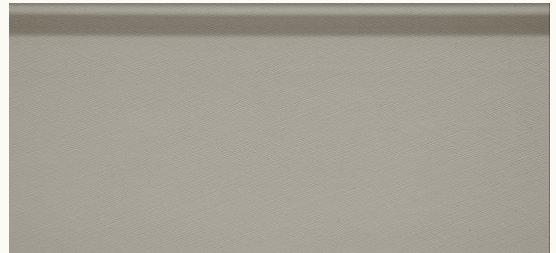


S-11

95 MM

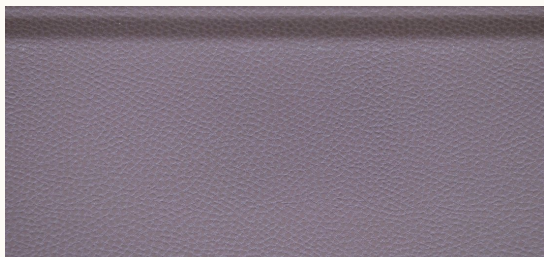


S-12

95 MM

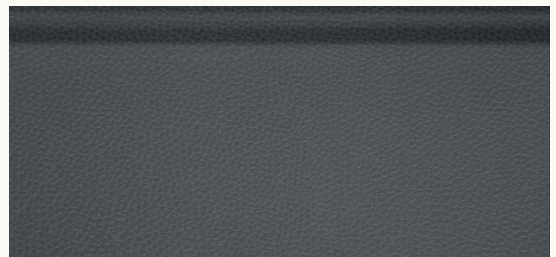


S-13

95 MM

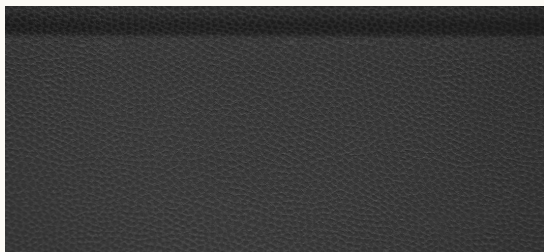


S-14

95 MM

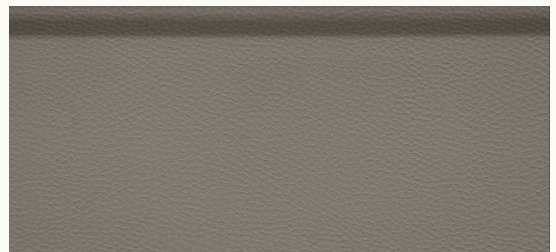


S-15

95 MM

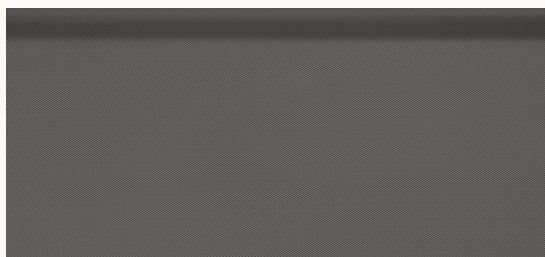

S-16

95 MM

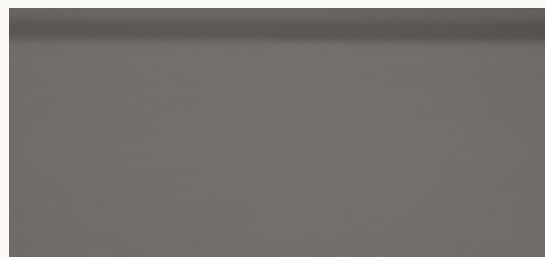


S-17

95 MM



S-18

95 MM

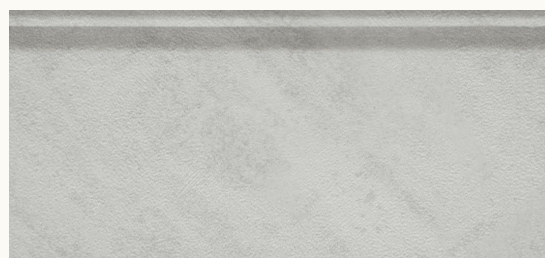

S-19

95 MM




S-20

95 MM



S-21

95 MM

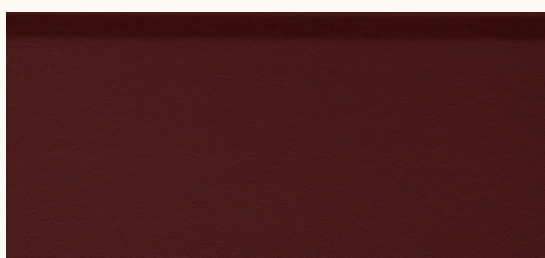

S-22

95 MM



S-23

95 MM




S-24

95 MM




S-25

95 MM

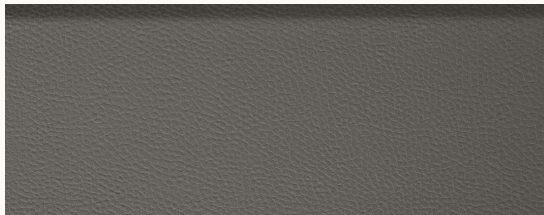

S-26

95 MM

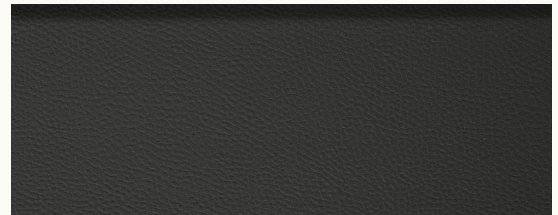

S-27

95 MM



S-28

95 MM



S-29

95 MM




S-30

95 MM



S-31

95 MM

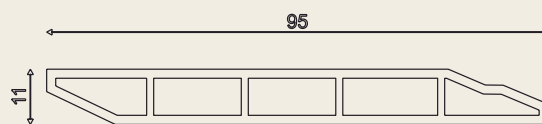

SKIRT SECTION · 95 × 11 MM

REFERENCE

Sizes & fixing

PROFILE	NOMINAL SIZE	APPLICATION
Cressida Skirt	2900 × 95 × 11 mm	Moulded skirting profile, classical stepped top edge

INSTALLATION

Fix with adhesive on a true, dry substrate, or mechanically to a battened frame at 400–600 mm centres. Allow material to acclimatise on site for 24 hours before installation. Set out from the most visible corner so any cut panel lands where it will be least seen. Retain offcuts from the same batch for later repair.

CARE

Clean with a damp cloth and mild detergent. Avoid solvents, abrasive pads and steam. No wax, oil or polish is required at any point in the life of the panel.



Premium interior and exterior surface materials — supplied, detailed and installed.

VISIT

1st Floor, 13C Paul Mansions
6 Bishop Lefroy Road, opp. Tata Tea
Near Rabindra Sadan
Kolkata 700020, West Bengal

CONTACT

+91 98300 20010
thinkwood.ashish@gmail.com
thinkwood.in

FOLLOW

Instagram @thinkwood.in
Facebook /thinkwoodofficial

SAMPLES

Physical samples of every code in this book are available on request. Site mock-ups can be arranged for orders above 500 sq ft.

BILLING ENTITY

Altius Realty Services
Kolkata