

Fifteen finishes. Three sections.

Interior louvre panelling in square, rounded and peaked profiles — 2.9 m lengths, supplied across Eastern India by Thinkwood.

LENGTH	PROFILES	FINISHES	DEPTHS
2900	3	15	6–11

L16-176 BRASS OAK · L-16 ROUNDED FLUTE



LOUVRE PANELLING FROM THINKWOOD

Texture you can specify by the millimetre

Slatted walls have become the default move for lobbies, reception counters and bedroom headboards, and most of them are built on site out of timber battens — slow, uneven, and never quite square by the end of a long run.

These are moulded panels instead. Every rib is identical down a 2.9 m length, the shadow gap is the same at the top of the wall as at the bottom, and the whole surface goes up against adhesive rather than a batten frame.

Three sections, fifteen finishes, all held at the Experience Centre on Bishop Lefroy Road alongside our cladding, decking and flooring programmes.

L - 15	Square rib	2900 × 225 × 11 mm
L - 16	Rounded flute	2900 × 228 × 6 mm
L - 17	Peaked rib	2900 × 224 × 10 mm

THE SECTIONS

All three profiles, at actual size

Printed 1:1 — hold the page against a sample and the ribs line up.
These are the manufacturer's own sections, showing the hollow behind each rib and the interlock at the panel edge.

L-15 2900 × 225 × 11 mm

SQUARE RIB · 11 MM DEEP



L-16 2900 × 228 × 6 mm

ROUNDED FLUTE · 6 MM DEEP



L-17 2900 × 224 × 10 mm

PEAKED RIB · 10 MM DEEP



DEEPEST SHADOW

L-15

11 mm with square lands. The most graphic of the three and the one that still reads across a wide lobby.

SHALLOWEST

L-16

6 mm half-rounds. Loses least floor area, and the softest under downlights where sharp ribs would stripe.

FINEST PITCH

L-17

19 peaks across 224 mm. Resolves into a woven texture at distance rather than distinct battens.

L-15 • Square rib

Nine finishes on the deep square section, running from bright white through to basalt. The flat lands take colour evenly, so pale tones stay clean.



Snow

L15-155



Linen

L15-156



Chalk

L15-100



Oyster

L15-154



Clay Blush

L15-043



Ash

L15-153




Driftwood

L15-051



Sage

L15-052

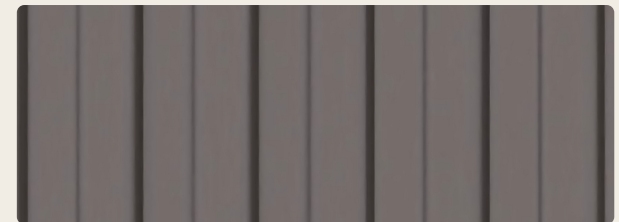

Basalt

L15-152



L-15 SECTION • 11 MM DEEP

L-16 • Rounded flute

Three warm metallics on the shallow half-round. The curve catches a highlight along every rib, which is what gives these their sheen.




Brass Oak

L16-176



Bronze Taupe

L16-174

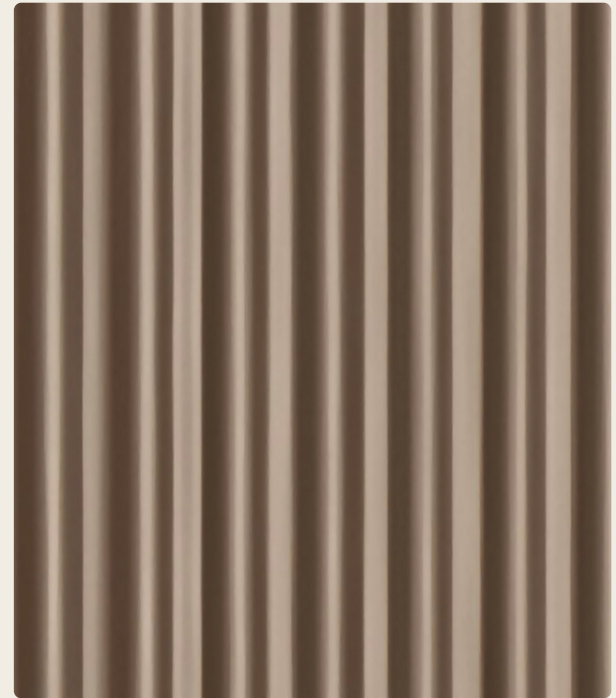

Walnut

L16-175



L-16 SECTION • 6 MM DEEP


L-17 • Peaked rib

Three woven-effect finishes on the fine peaked section. The secondary texture between ribs is moulded in, not printed.



Honey Weave

L17-178

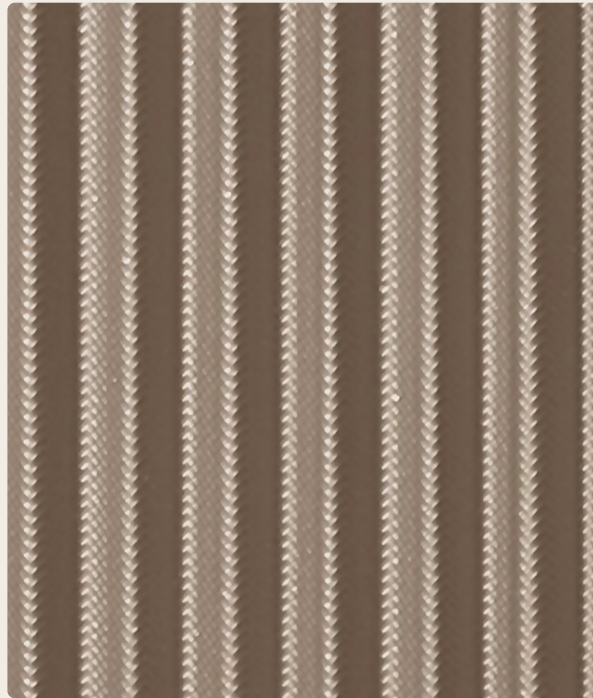

Mocha Weave

L17-177



Olive Weave

L17-080



L-17 SECTION • 10 MM DEEP

PERFORMANCE

What the panels are rated for

The properties that decide whether a slatted wall survives a public building rather than just looking right on handover day.

Scratch resistant

Holds up to trolley and furniture contact in circulation areas.

Anti-fingerprint

Surface does not hold marks at handrail and doorway height.

Colour stability

Pigment holds through the section rather than sitting on a film.

Long durability

Rated for continuous interior service without refinishing.

Fire resistant

Specified for use in lobbies, corridors and other public rooms.

Easy to clean

Wipes down with a damp cloth; no sealing or waxing cycle.

Termite resistant

Not a food source, unlike solid timber battens.

Water resistant

Suits bathrooms, kitchens and covered outdoor soffits.

AT A GLANCE

Panel length	2900 mm	Coverage width	224 – 228 mm
Section depth	6 / 10 / 11 mm	Nominal sheet	9'6" × 9"
Fixing	Adhesive to a true substrate	Finishes	15 across three profiles

A matched adhesive is available for the range — ask for it with the order rather than substituting a general-purpose tile bond. Panels fix to a true, dry substrate; no batten frame is needed.

SPECIFY & ORDER

Send us the elevation, we'll send the section

Tell us the run length, the ceiling height and the light you are working with, and we will come back with the profile that suits it and a finish from the fifteen.

LENGTHS

2900 mm, cut to size on request

FIXING

Adhesive, no batten frame needed

USE

Interior walls, ceilings, counters

SAMPLES

Full range at the Experience Centre

LEAD TIME

Confirmed at quotation

ALSO FROM US

Cladding, decking, SPC, laminates

ENQUIRIES

Ashish Kanoi

Phone +91 98300 20010

Website thinkwood.in

Email thinkwood.ashish@gmail.com

Instagram @ [thinkwood.in](https://www.instagram.com/thinkwood.in)

Thinkwood Experience Centre
13C Paul Mansions, 6 Bishop Lefroy Road
Kolkata 700 020

THiNKWOOD
DECORATIVE WOODS