



Flexi Clay.

A soft, bendable architectural surface — 3–5 mm thin, fire-classified A2, and finished in the textures of raw clay, travertine, weathered stone and woven linen.

Not porcelain. Not tile.


Flexi clay is a modified-clay surface. Natural stone powder is blended with clay, moulded under a temperature-controlled system, baked, then irradiation cross-linked — producing a decorative sheet that bends where tile or stone would crack.

The result is soft, light and thin. It wraps columns, curves around arches and turns corners without a mitre joint, while reading on the wall as genuine stone.

Because it is inorganic, it will not burn or support combustion. Every finish in this catalogue carries **Fire Classification A (A2)**.

It is waterproof and moisture-proof, resistant to freeze-thaw cycling and to ageing — which is why the same panel can be specified for an interior feature wall and for a full building façade.

Supplied and installed across Eastern India by Thinkwood.

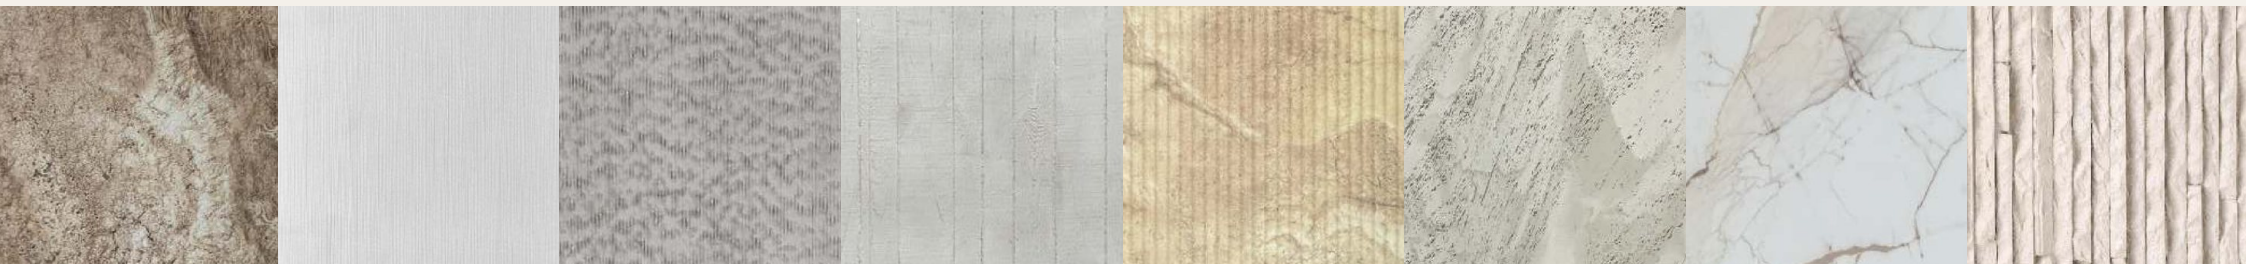

Six reasons it gets chosen over stone.

01

Bendable

Flexes around columns, arches and curved partitions without cracking or mitring.

03

Fire class A2

Inorganic and non-combustible — will not burn or support combustion.

05

Lightweight

A fraction of the weight of natural stone. Lower structural and handling load.

02

3–5 mm thin

Adds almost nothing to the wall build-up. Ideal for retrofit over existing surfaces.

04


Waterproof

Moisture-proof and freeze-thaw resistant, suitable for wet areas and exteriors.

06

Ageing resistant

Colour and texture hold up under UV and weather over the long term.

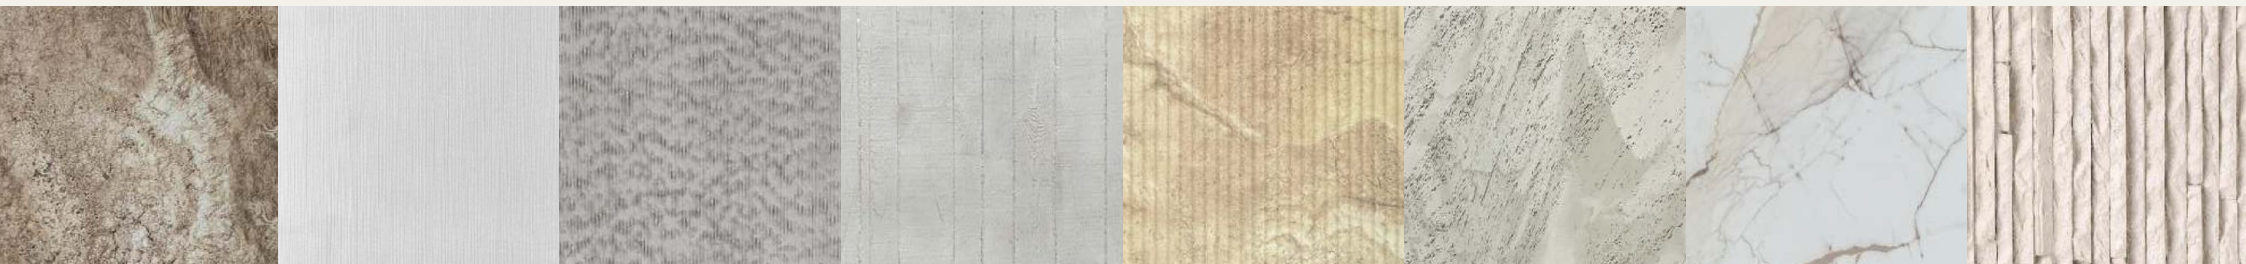

Where it works.

Interior

Feature and background walls · bedroom headboard panels · living and dining accent walls · TV and media walls · reception and lobby faces · retail and hospitality interiors · bar and pantry backs · curved and arched partitions · ceiling panels · wardrobe and door shutter faces.

Exterior


Building façades and elevations · boundary and compound walls · landscape and water-feature walls · balcony and terrace faces · porch and entrance surrounds · column cladding · signage backdrops.

Substrates

Plaster, concrete, gypsum board, cement board, plywood and existing tile — subject to a sound, level and dry surface.

Finish

Butt-jointed or grooved. Panels can be scored and folded on external corners for a continuous, joint-free return.

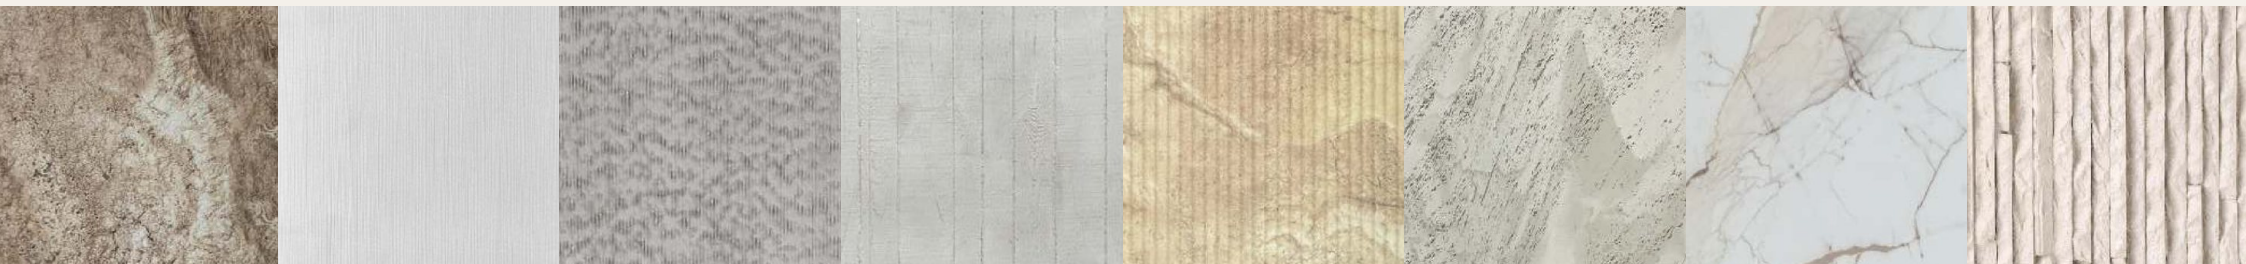

33 finishes.




TW 101

Beige



TW 101

Khaki

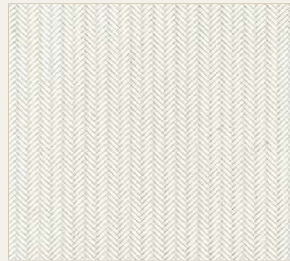

TW 102

Beige



TW 103

Gritty Beige



TW 104

Beige



TW 105

Off White




TW 106

Claybank



TW 107

Beige

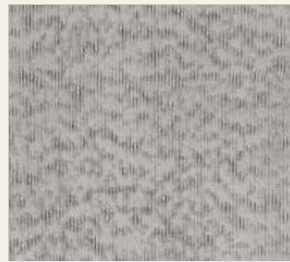

TW 108

Grey



TW 109

Light Grey



TW 110

Claybank



TW 111

Gradient Grey




TW 112

Off White



TW 113

Beige



TW 114

Beige



TW 114

Grey



TW 115

Khaki



TW 116

Golden




TW 117
Gradient Yellow



TW 118
Light Grey



TW 119
Red/Light Red/Beige



TW 120
Beige



TW 121
Light Grey




TW 122
Beige



TW 123
White Travertine



TW 124
Yellow



TW 125
Beige



TW 126
Beige



TW 127
Beige



TW 128
Beige



TW 129
Beige



TW 130
White



TW 131
White

FLEXI CLAY

TW 101

Beige



PANEL SIZE	1500 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



TW
101
BEIGE



FLEXI CLAY

TW 101

Khaki



PANEL SIZE 1500 × 600 mm

THICKNESS 3–5 mm

CATEGORY Flexi clay

APPLICATION Wall / background wall, interior & exterior

FIRE CLASS A (A2)





**TW
101**
KHAKI

FLEXI CLAY

TW 102

Beige



PANEL SIZE	1460 × 590 mm
------------	---------------

THICKNESS	3–5 mm
-----------	--------

CATEGORY	Flexi clay
----------	------------

APPLICATION	Wall / background wall, interior & exterior
-------------	---

FIRE CLASS	A (A2)
------------	--------



TW
102
BEIGE




FLEXI CLAY

TW 103

Gritty Beige



PANEL SIZE	1200 × 600 mm
THICKNESS	3-5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)

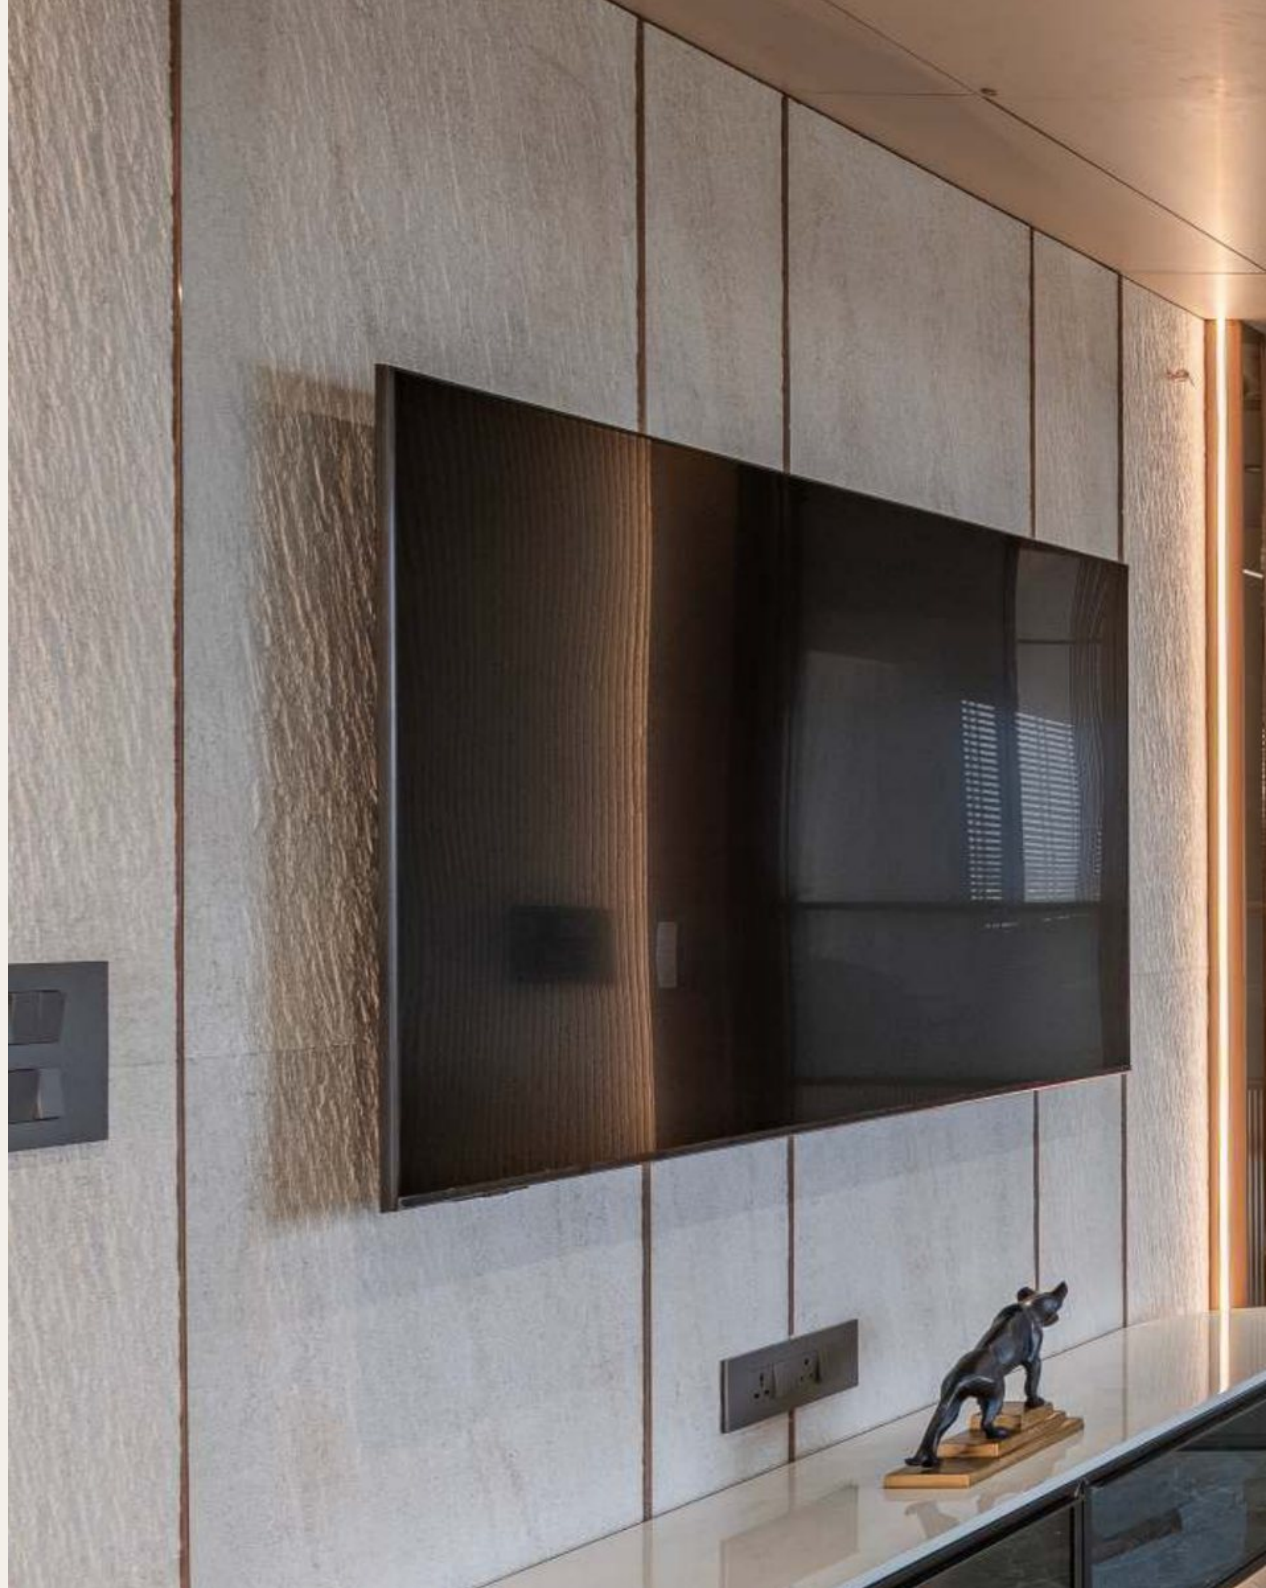

TW 103

GRITTY BEIGE



FLEXI CLAY

TW 104

Beige



PANEL SIZE	2800 × 580 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)





TW
104
BEIGE


FLEXI CLAY

TW 105

Off White



PANEL SIZE	900 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)

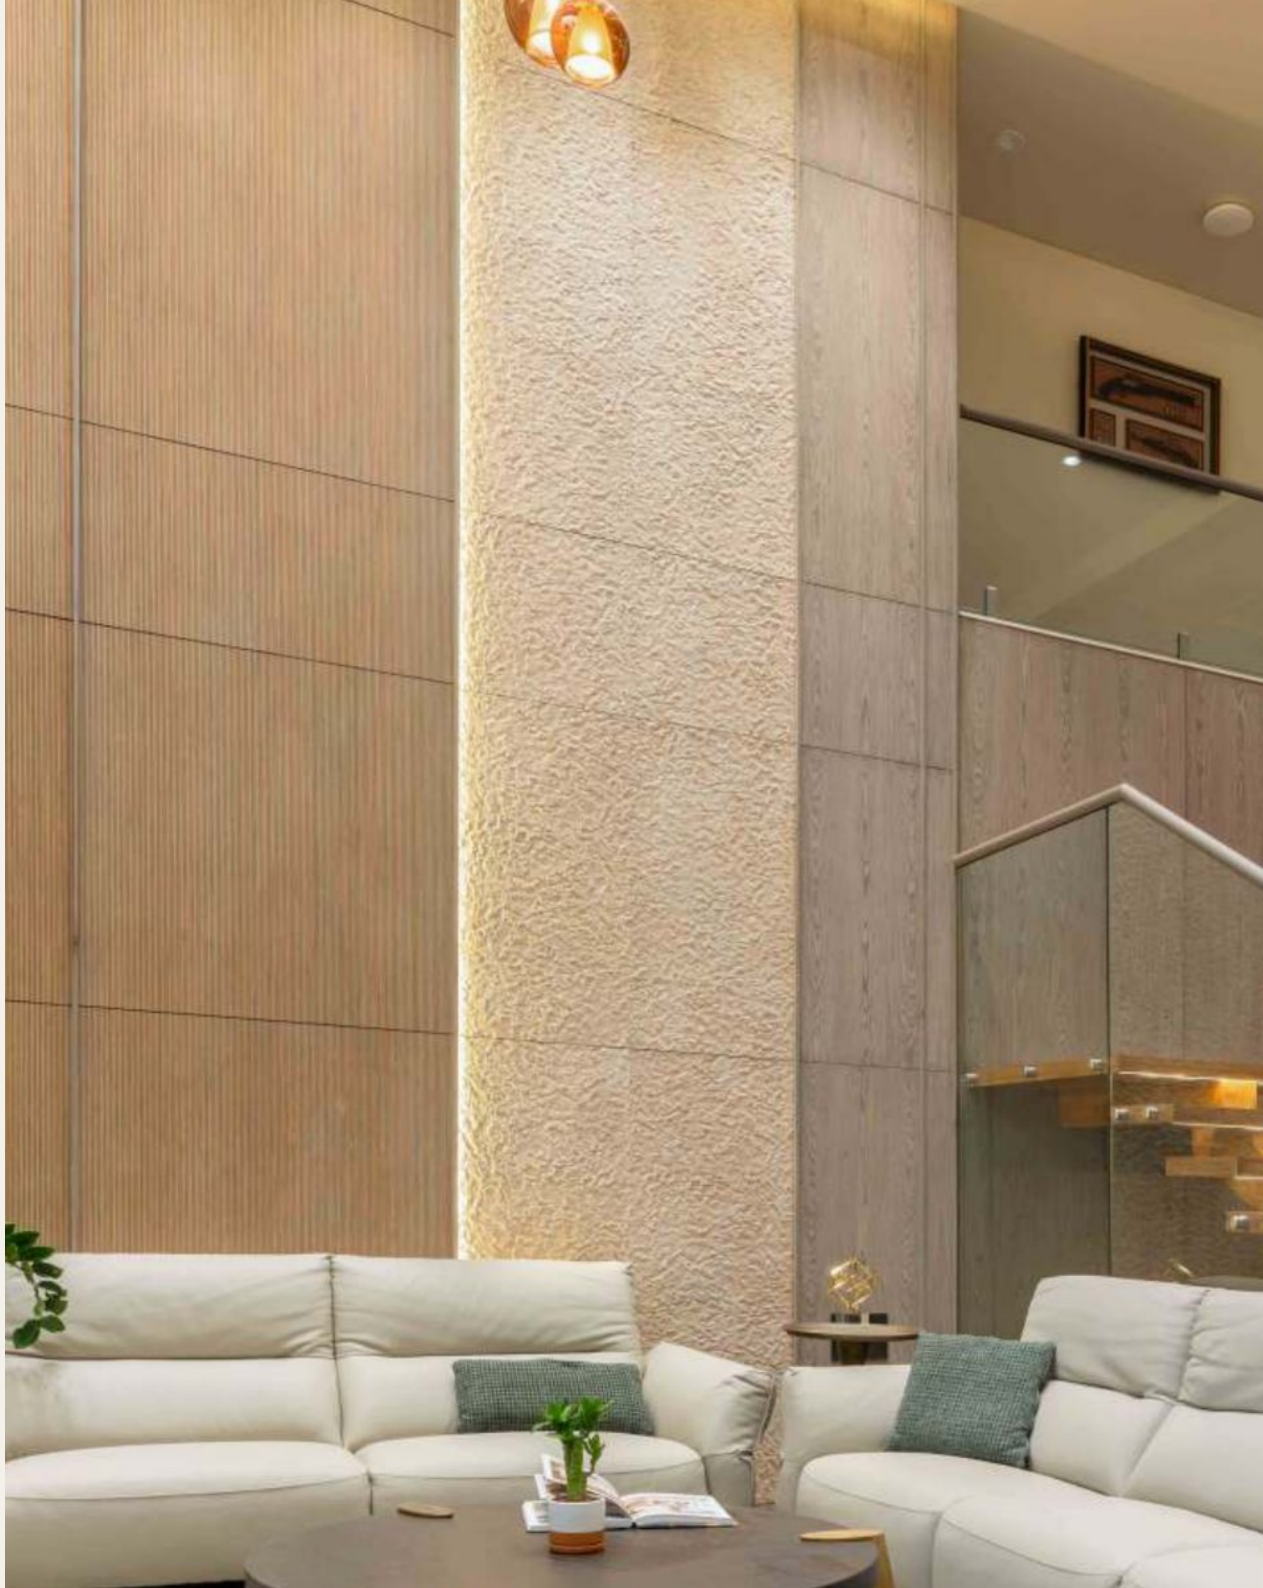



TW
105

OFF WHITE

FLEXI CLAY

TW 106

Claybank



PANEL SIZE 900 × 600 mm

THICKNESS 3–5 mm

CATEGORY Flexi clay

APPLICATION Wall / background wall, interior & exterior

FIRE CLASS A (A2)



© Prashant Parmar Architect

© PRASHANT PARMAR ARCHITECT




TW
106

CLAYBANK

FLEXI CLAY

TW 107

Beige

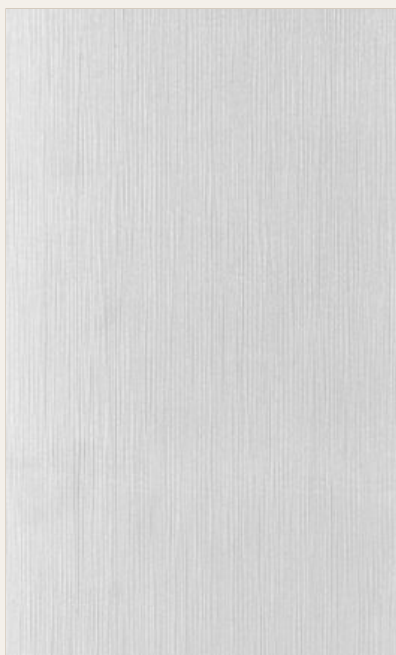

PANEL SIZE	2900 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)





TW
107
BEIGE

FLEXI CLAY


TW 108

Grey



PANEL SIZE	2950 × 670 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



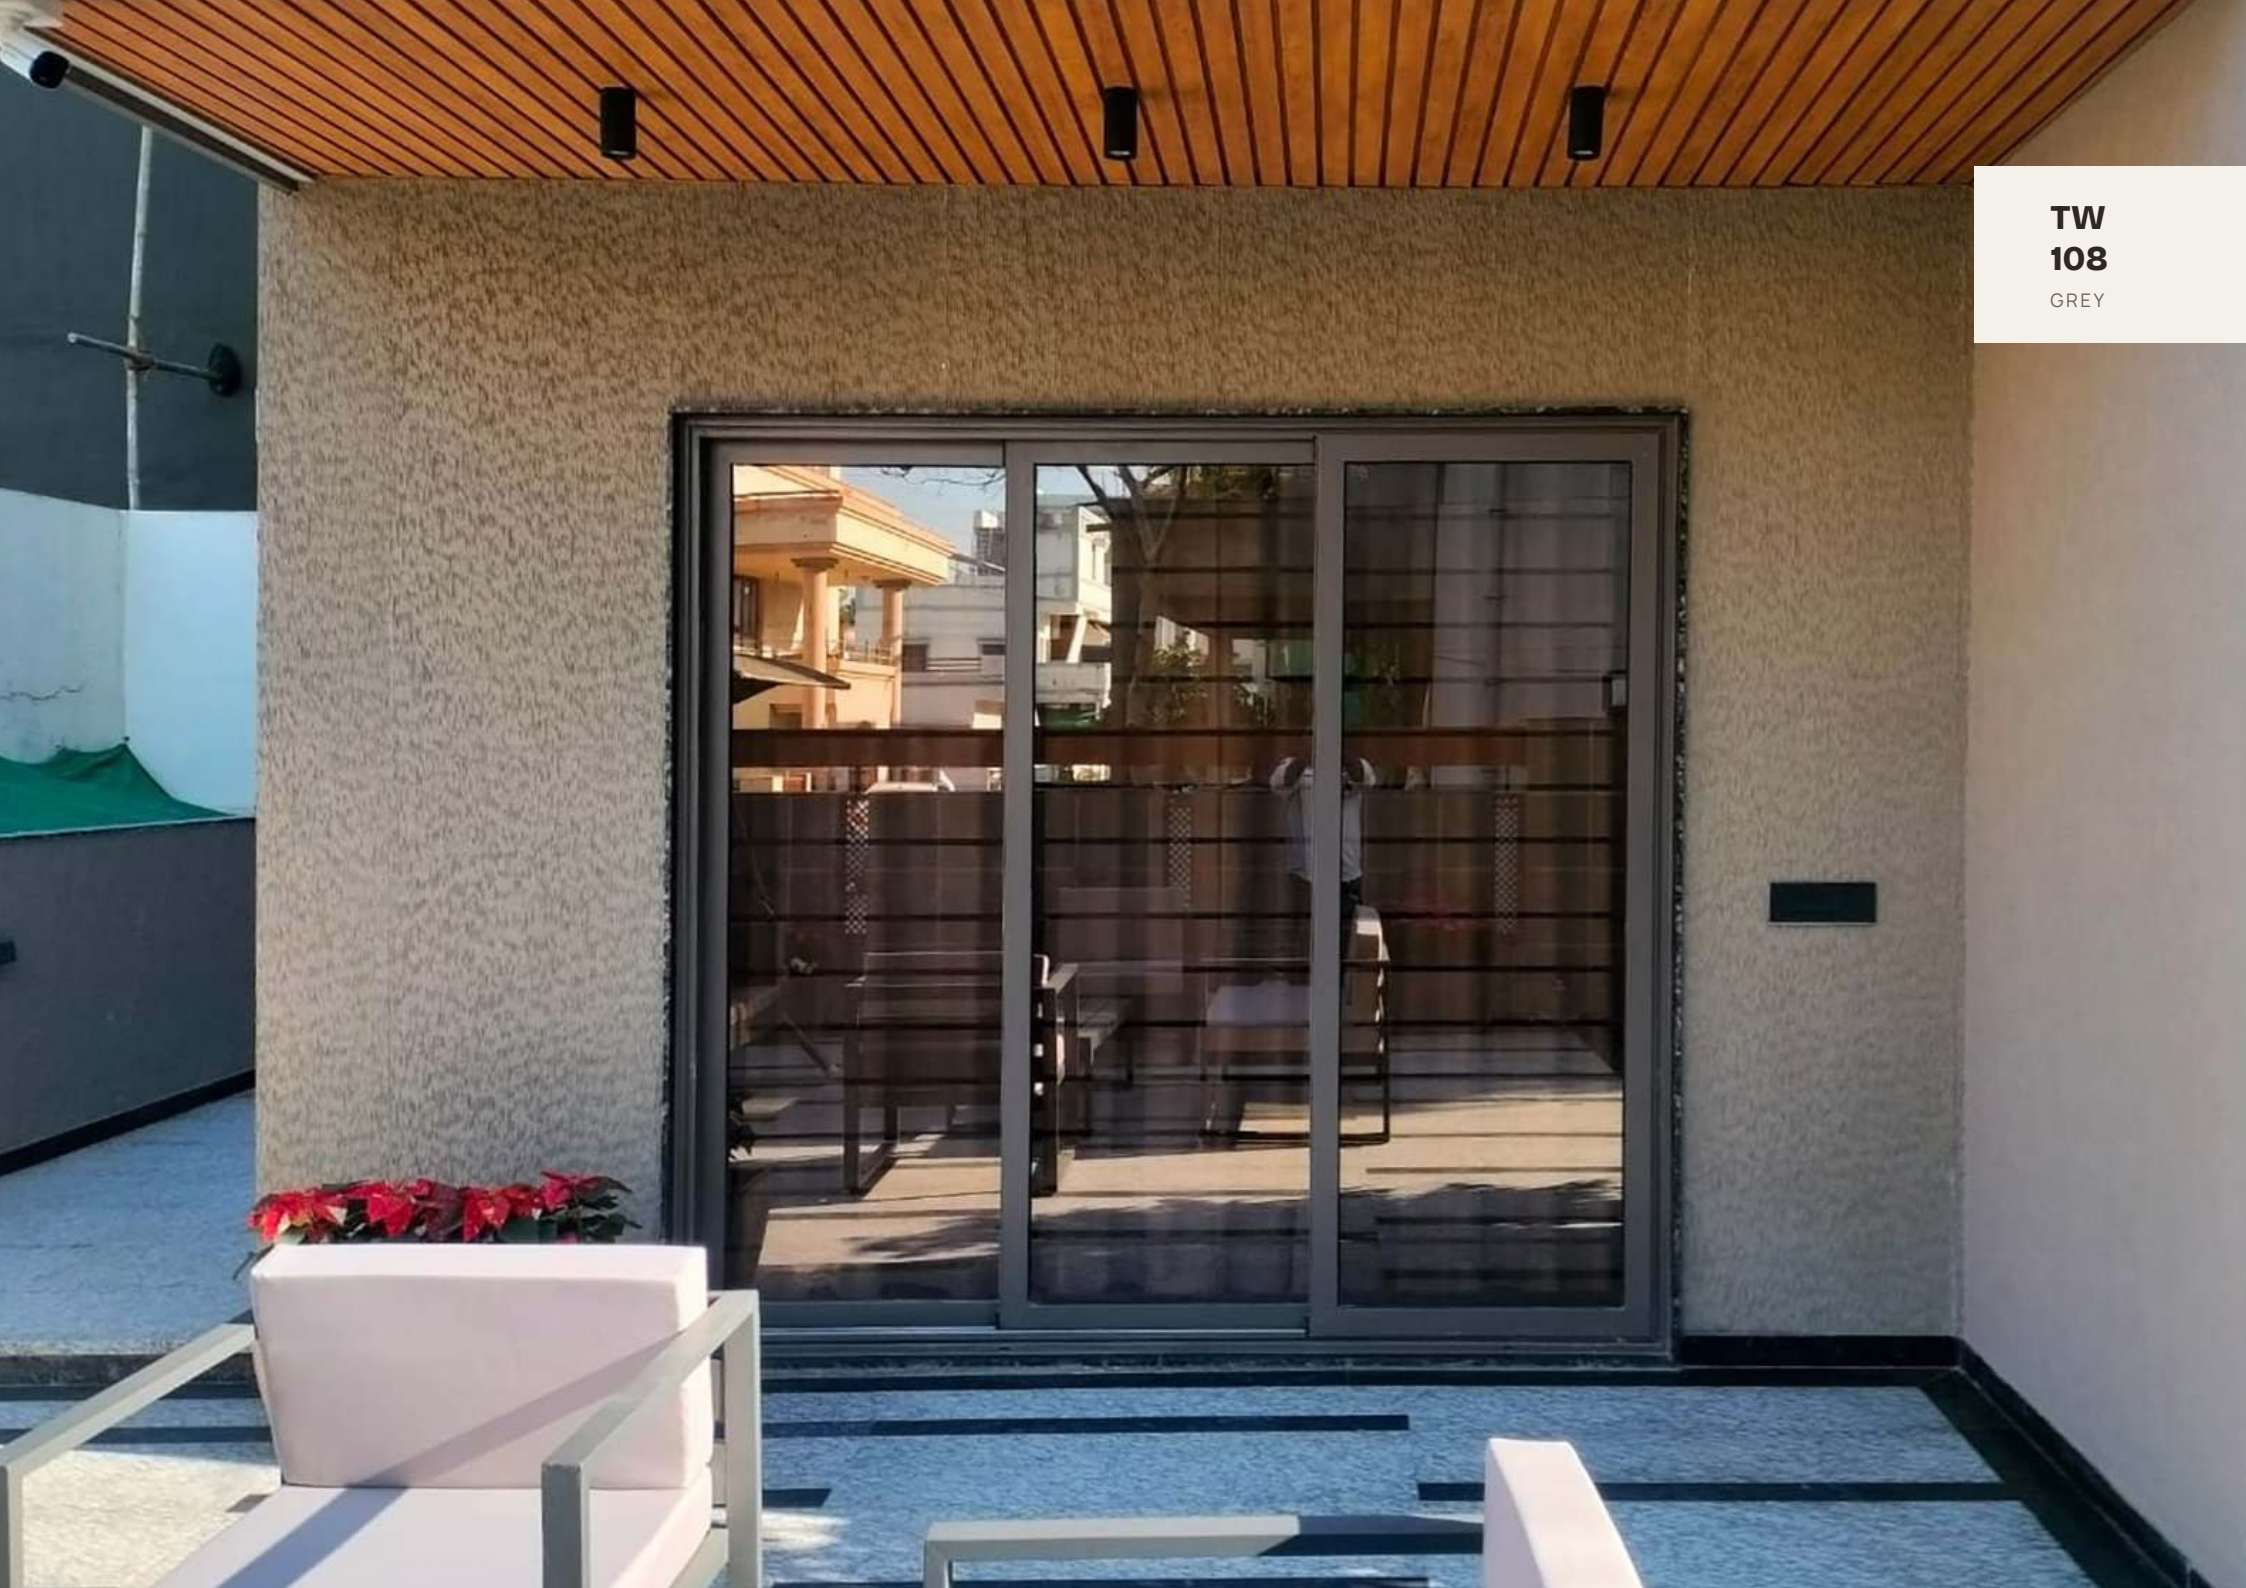

TW
108
GREY

FLEXI CLAY

TW 109

Light Grey



PANEL SIZE	2950 × 565 mm
------------	---------------

THICKNESS	3–5 mm
-----------	--------

CATEGORY	Flexi clay
----------	------------

APPLICATION	Wall / background wall, interior & exterior
-------------	---

FIRE CLASS	A (A2)
------------	--------



TW 109

LIGHT GREY



FLEXI CLAY

TW 110


Claybank



PANEL SIZE	3000 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



TW 110
CLAYBANK



FLEXI CLAY

TW 111

Gradient Grey



PANEL SIZE	2400 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



TW 111

GRADIENT GREY



FLEXI CLAY

TW 112

Off White



PANEL SIZE	1200 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)





TW 112

OFF WHITE

FLEXI CLAY

TW 113

Beige



PANEL SIZE	300 × 600 mm
THICKNESS	3-5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)






TW
113

BEIGE

FLEXI CLAY

TW 114

Beige

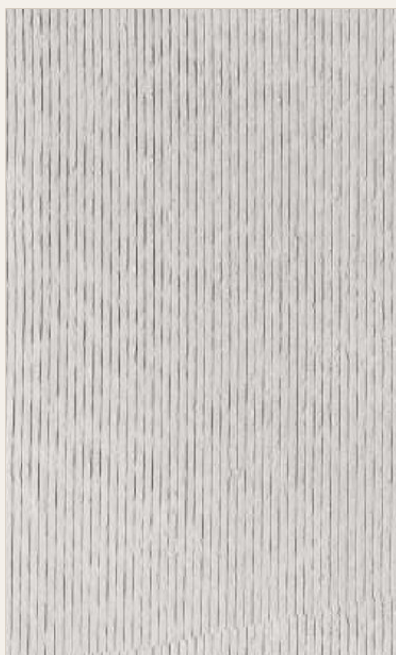

PANEL SIZE	1200 × 600 mm
THICKNESS	3-5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



TW
114
BEIGE




FLEXI CLAY

TW 114

Grey



PANEL SIZE	1200 × 600 mm
THICKNESS	3-5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)

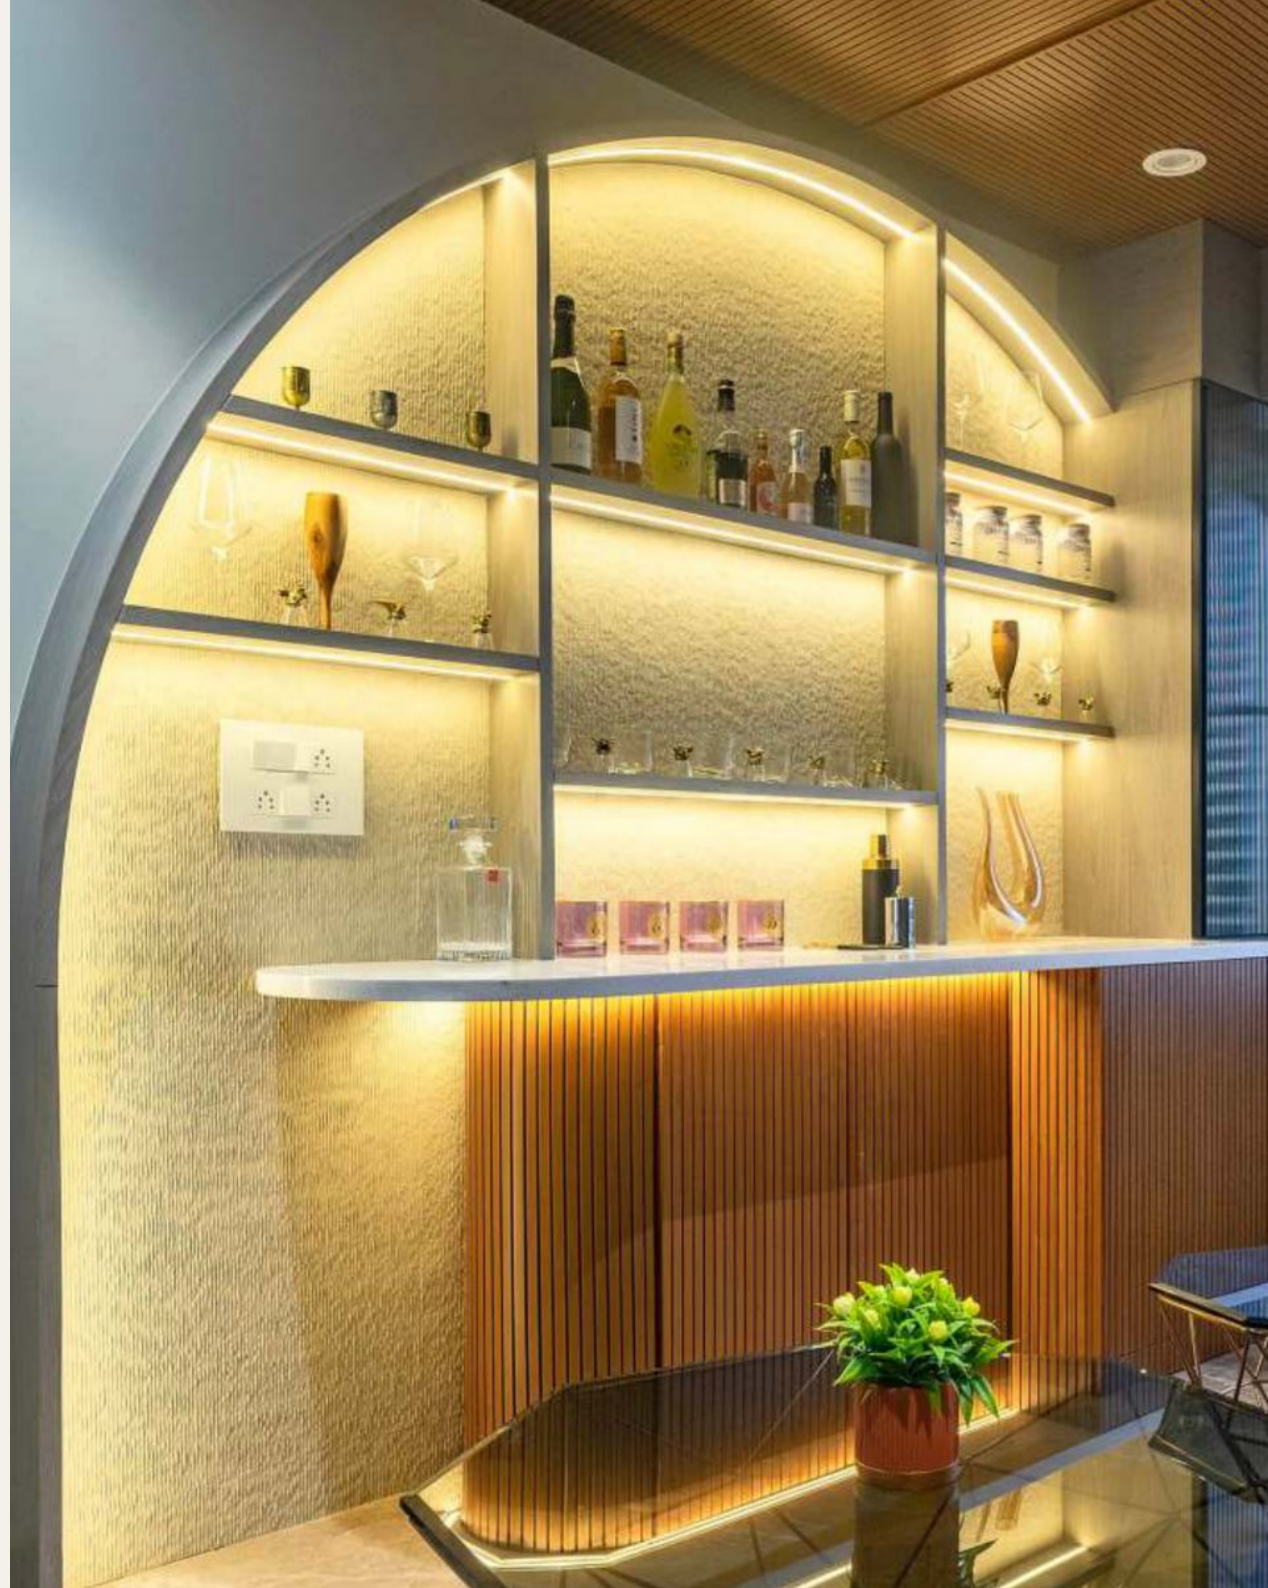

TW
114
GREY



FLEXI CLAY

TW 115

Khaki



PANEL SIZE	1200 × 600 mm
------------	---------------

THICKNESS	3–5 mm
-----------	--------

CATEGORY	Flexi clay
----------	------------

APPLICATION	Wall / background wall, interior & exterior
-------------	---

FIRE CLASS	A (A2)
------------	--------



TW
115
KHAKI



FLEXI CLAY

TW 116

Golden



PANEL SIZE	1200 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)





**TW
116**

GOLDEN

FLEXI CLAY

TW 117

Gradient Yellow



PANEL SIZE	1200 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



TW 117

GRADIENT YELLOW




FLEXI CLAY

TW 118

Light Grey



PANEL SIZE	2400 × 580 mm
THICKNESS	3-5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)

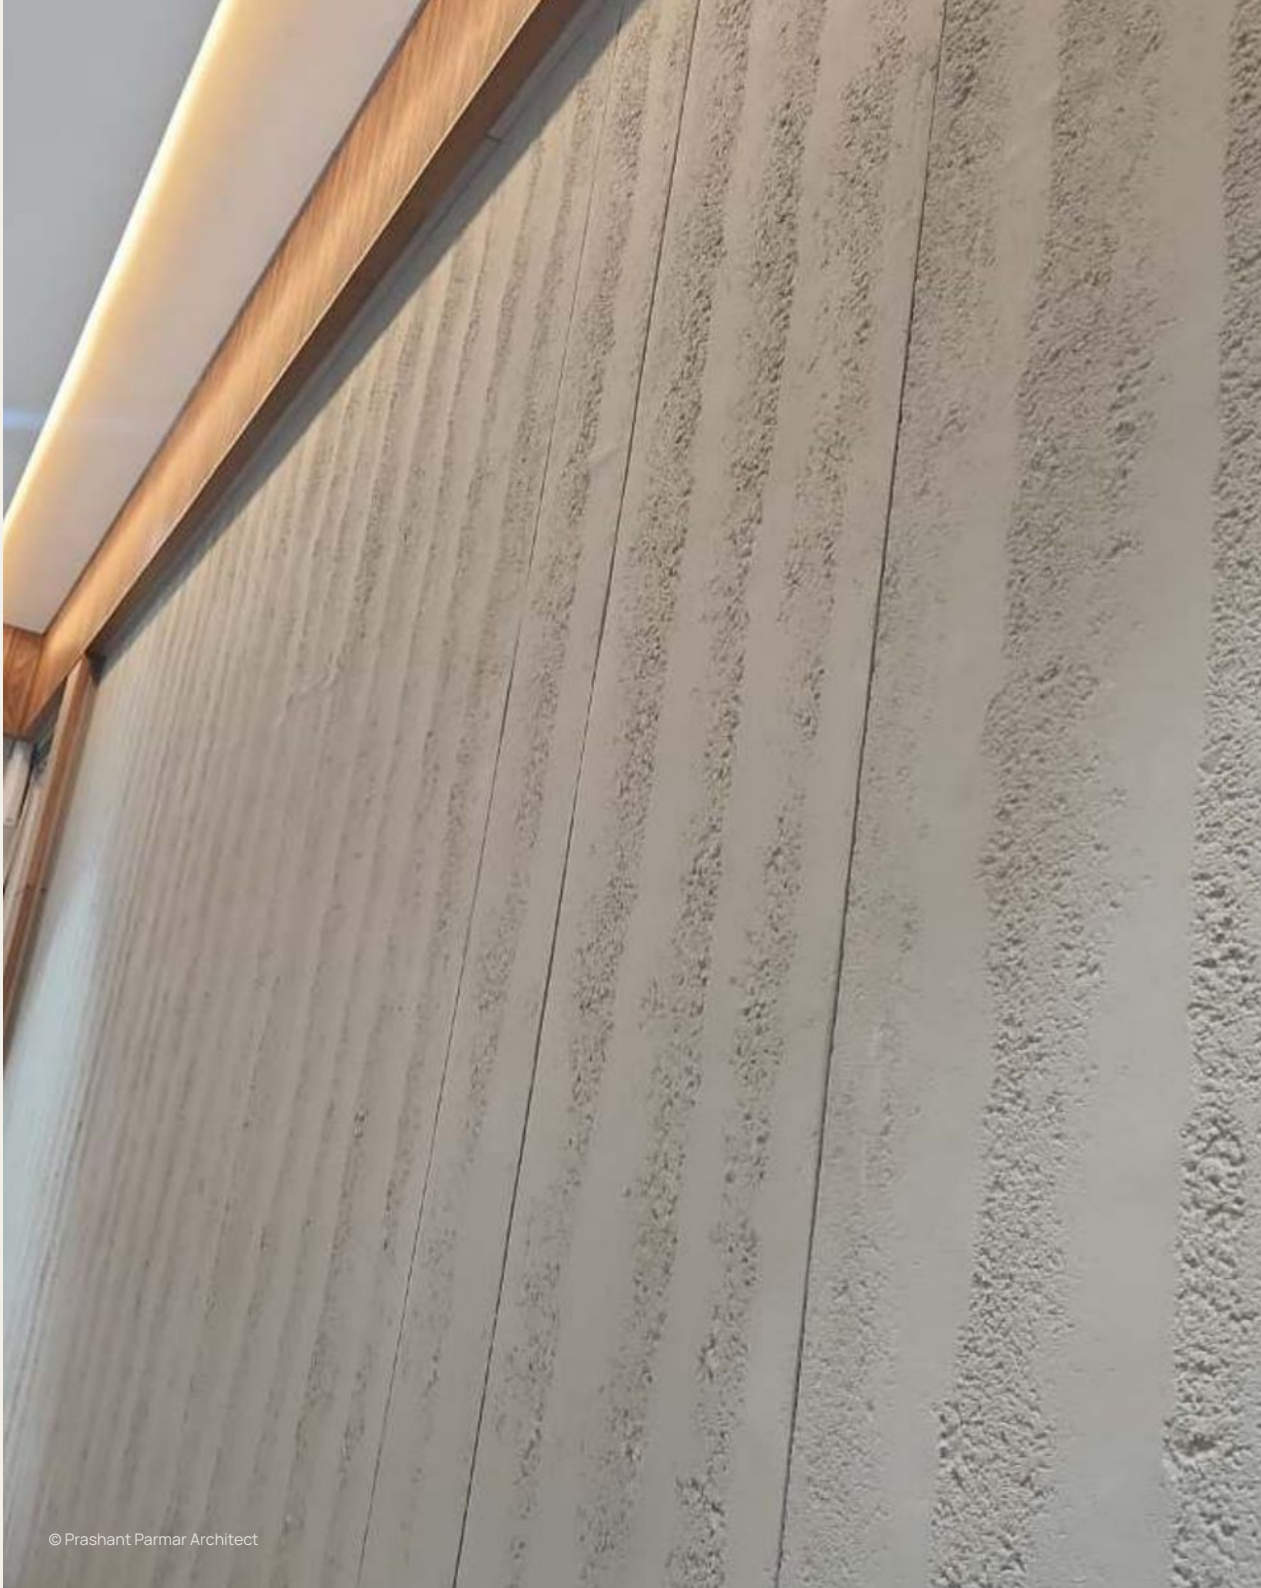

TW 118

LIGHT GREY



FLEXI CLAY

TW 119

Red/Light Red/Beige



PANEL SIZE	240 × 60 mm
------------	-------------

THICKNESS	3–5 mm
-----------	--------

CATEGORY	Flexi clay
----------	------------

APPLICATION	Wall / background wall, interior & exterior
-------------	---

FIRE CLASS	A (A2)
------------	--------



TW 119

RED/LIGHT RED/BEIGE

"IN THE JOY OF OTHERS,
LIES OUR OWN..."
H H PRAMUKH SWAMI MAHARAJ



FLEXI CLAY

TW 120

Beige



PANEL SIZE	1475 × 590 mm
------------	---------------

THICKNESS	3–5 mm
-----------	--------

CATEGORY	Flexi clay
----------	------------

APPLICATION	Wall / background wall, interior & exterior
-------------	---

FIRE CLASS	A (A2)
------------	--------





TW
120
BEIGE

FLEXI CLAY

TW 121

Light Grey



PANEL SIZE	1600 × 580 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



TW 121
LIGHT GREY



FLEXI CLAY

TW 122

Beige



PANEL SIZE

2400 × 600 mm

THICKNESS

3–5 mm

CATEGORY

Flexi clay

APPLICATION

Wall / background wall, interior & exterior

FIRE CLASS

A (A2)



TW
122
BEIGE



FLEXI CLAY

TW 123

White Travertine



PANEL SIZE	2400 × 600 mm
------------	---------------

THICKNESS	3–5 mm
-----------	--------

CATEGORY	Flexi clay
----------	------------

APPLICATION	Wall / background wall, interior & exterior
-------------	---

FIRE CLASS	A (A2)
------------	--------



TW 123

WHITE TRAVERTINE



FLEXI CLAY

TW 124

Yellow



PANEL SIZE	2980 × 595 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)





**TW
124**

YELLOW

FLEXI CLAY

TW 125

Beige



PANEL SIZE	3000 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)





TW
125
BEIGE

FLEXI CLAY

TW 126

Beige



PANEL SIZE	2980 × 595 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



FLEXI CLAY

TW 127

Beige



PANEL SIZE	2400 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



TW
127
BEIGE



FLEXI CLAY

TW 128

Beige



PANEL SIZE	2980 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)





TW
128
BEIGE

FLEXI CLAY

TW 129

Beige



PANEL SIZE	595 × 296 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)





TW
129
BEIGE

FLEXI CLAY

TW 130

White



PANEL SIZE	1203 × 608 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



FLEXI CLAY

TW 131

White



PANEL SIZE	2400 × 600 mm
THICKNESS	3–5 mm
CATEGORY	Flexi clay
APPLICATION	Wall / background wall, interior & exterior
FIRE CLASS	A (A2)



TW
131

WHITE



Specification notes.

Handling

Store flat and dry, away from direct sunlight. Do not stack heavy loads on open panels. Acclimatise on site before installation.

Cutting

Cut with a sharp blade or fine-tooth saw. Score and fold for external returns. Edges can be sanded to blend a joint.


Fixing

Applied with a suitable tile or panel adhesive over a level, sound, dry substrate. Roller-press the full face to remove air and ensure contact at the edges.

Maintenance

Wipe with a damp cloth and mild detergent. Avoid abrasive pads and solvent-based cleaners. Exterior applications may be sealed on request.

Panel sizes are nominal and subject to manufacturing tolerance. Swatch images are reproduced photographically and are indicative only — please confirm against a physical sample before specification. Batch variation is inherent to the material and part of its natural character.

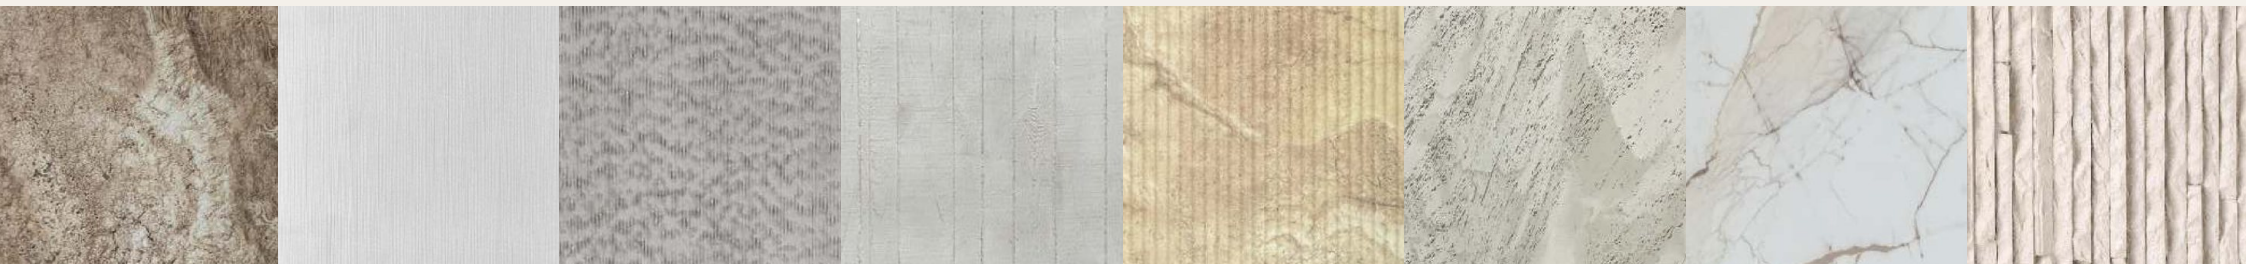

From nature to texture.

EXPERIENCE CENTRE

13C Paul Mansions, Bishop Lefroy Road
Kolkata 700020, West Bengal

ENQUIRIES

+91 98300 20010
thinkwood.ashish@gmail.com

ONLINE

Website thinkwood.in

 [thinkwood.in](https://www.instagram.com/thinkwood.in)

 [thinkwood](https://www.facebook.com/thinkwood)