

THINKWOOD
DECORATIVE WOODS



10 FINISHES

TRENDY LOUVRES & MCS

PROFILE L-8

LOUVRE 2440 × 167 × 9 MM

SHEET 3000 × 1220 × 1.5 MM

THE COLLECTION

TRENDY LOUVRES & MCS

A textured, plaster-and-stone reading of the same system. The L-8 louvre carries a soft leather grain; the mineral composite sheets carry a trowelled-concrete surface. Pair the two to break a long wall into fluted and flat planes without changing material.

Every finish is held against the code printed beneath it. Quote the code and the profile when raising an enquiry, and order the full quantity against a single production batch — shades vary slightly between runs.

WATER RESISTANT

Suited to kitchens, wash areas and covered balconies; will not swell like MDF.

TERMITE RESISTANT

The composite core carries no cellulose food source.

FIRE RESISTANT

Self-extinguishing formulation; certificates available on request.

COLOUR STABILITY

UV-stable decor layer holds its tone in daylit interiors.

ANTI-FINGERPRINT

Low-sheen face resists marking on high-traffic surfaces.

EASY TO CLEAN

Damp cloth and mild detergent; no wax or polish required.

PROFILE

L-8

LOUVRE

2440 × 167 × 9 mm

SHEET





3000 × 1220 × 1.5 mm

FINISHES

10

L-8 · TEXTURED LOUVRE

LOUVRE 2440 × 167 × 9 MM

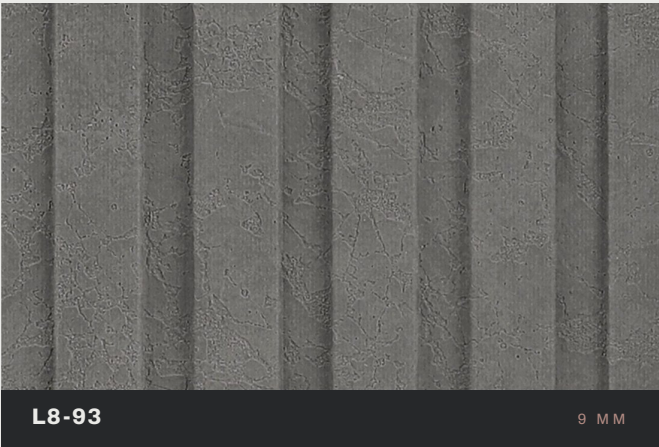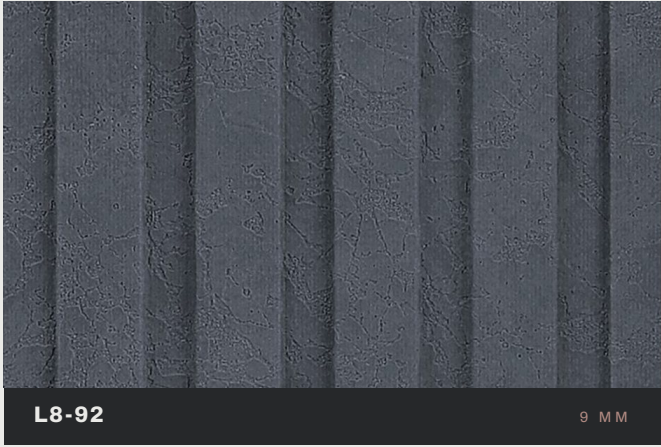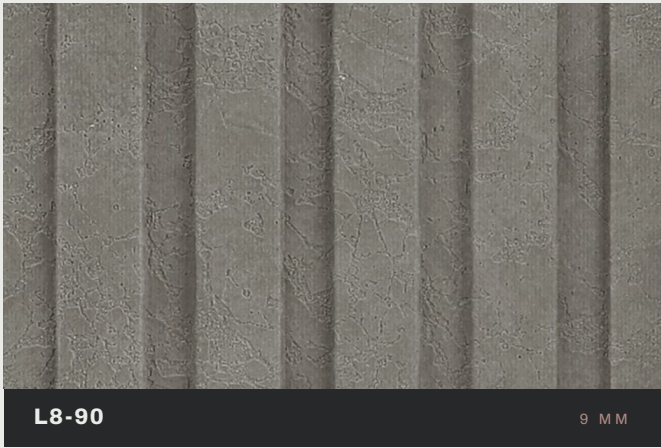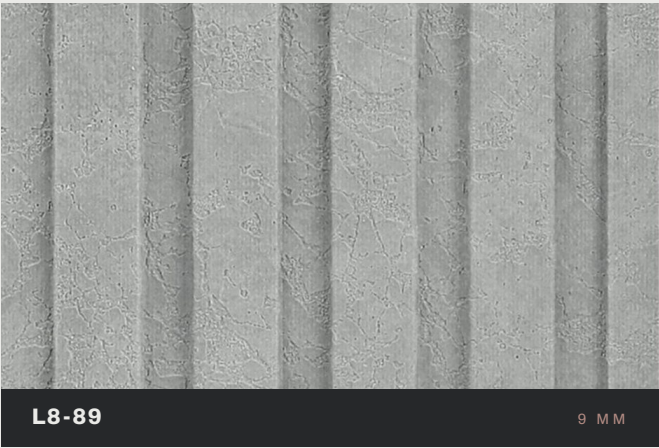

L-8 SECTION · 167 × 9 MM

MINERAL COMPOSITE SHEET

SHEET 3000 × 1220 × 1.5 MM



GM-WC-10489

MCS



GM-WC-10490

MCS



GM-WC-10491

MCS



GM-WC-10492

MCS



GM-WC-10493

MCS

REFERENCE

SIZES & FIXING

PROFILE	NOMINAL SIZE	APPLICATION
TRENDY L-8	2440 × 167 × 9 mm	Wide fluted louvre, soft leather-grain face
MINERAL COMPOSITE SHEET	3000 × 1220 × 1.5 mm	Flat sheet — flush planes, shutter faces, wraps

INSTALLATION

Fix with adhesive on a true, dry substrate, or mechanically to a battened frame at 400–600 mm centres.

Allow material to acclimatise on site for 24 hours before installation. Set out from the most visible corner so any cut panel lands where it will be least seen. Retain offcuts from the same batch for later repair.

CARE

Clean with a damp cloth and mild detergent. Avoid solvents, abrasive pads and steam. No wax, oil or polish is required at any point in the life of the panel.



Premium interior and exterior surface materials —
supplied, detailed and installed.

VISIT

1st Floor, 13C Paul Mansions
6 Bishop Lefroy Road, opp. Tata Tea
Near Rabindra Sadan
Kolkata 700020, West Bengal

CONTACT

+91 98300 20010
thinkwood.ashish@gmail.com
thinkwood.in

FOLLOW

Instagram @thinkwood.in
Facebook /thinkwoodofficial

SAMPLES

Physical samples of every code in this
book are available on request. Site
mock-ups can be arranged for orders
above 500 sq ft.

BILLING ENTITY

Altius Realty Services
Kolkata